

KBLI121200 12.8V 120Ah



Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.


Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Storage Temperature Range: -20 °C-60 °C.

Superior Safety: Prismatic Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

Physical Dimension-mm

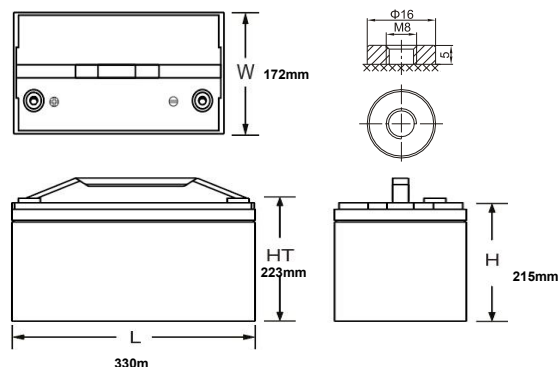

Electrical Performance

| | |
|------------------|--------------------|
| Nominal Voltage | 12.8 V |
| Nominal Capacity | 120 Ah |
| Capacity @ 10.8A | 300 min |
| Energy | 1536 Wh |
| Resistance | ≤30 mΩ @ 50% SOC |
| Self Discharge | <3% / Month |
| Cells | 32700 Cell 3.2V6Ah |

Mechanical Performance

| | |
|----------------------------|---|
| Dimension (L x W x H x HT) | 330 x 172 x 215 x 223mm 13.0 x 6.77 x 8.46 x 8.78" |
| Approx. Weight | 15.5 kg |
| Terminal Type | M8 |
| Terminal Torque | 80 ~ 100 in-lbs (9 ~ 11 N-m) |
| Case Material | ABS |
| Enclosure Protection | IP65 |

Charge Performance

| | |
|-----------------------------|-----------------------|
| Recommended Charge Current | 24 A |
| Maximum Charge Current | 60 A |
| Recommended Charge Voltage | 14.6 V |
| Charge Cut-Off Voltage | <15.2 V (0.5 ~ 1.5 s) |
| Reconnect Voltage | >14.4 V |
| Balancing Voltage | <14 V |
| Maximum Batteries in Series | 4 |
| Parallels Support | |

Temperature Performance

| | |
|--------------------------|---------------------------|
| Discharge Temperature | -4 ~ 140 °F (-20 ~ 60 °C) |
| Charge Temperature | 32 ~ 113 °F (0 ~ 45 °C) |
| Storage Temperature | 23 ~ 95 °F (-5 ~ 35 °C) |
| High Temperature Cut-Off | 149 °F (65 °C) |
| Reconnect Temperature | 118 °F (48 °C) |

Discharge Performance





| | |
|--------------------------------------|---------------------|
| Continuous Discharge Current | 50 A |
| Maximum continuous Discharge Current | 100 A |
| Peak Discharge Cut-Off Current | 300 A (5 ~15 ms) |
| Recommended Low Voltage Disconnect | 10 V |
| Discharge Cut-Off Voltage | >8.4V (50 ~ 150 ms) |
| Reconnect Voltage | >10 V |
| Short Circuit Protection | 200 ~ 600 μs |

Compliance

| | |
|-------------------------|-----------------------------------|
| Certifications | CE UN38.3 UL1642 & IEC62133 |
| Shipping Classification | UN 3480, CLASS 9 |

(Note) The Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data.

Performance Characteristics

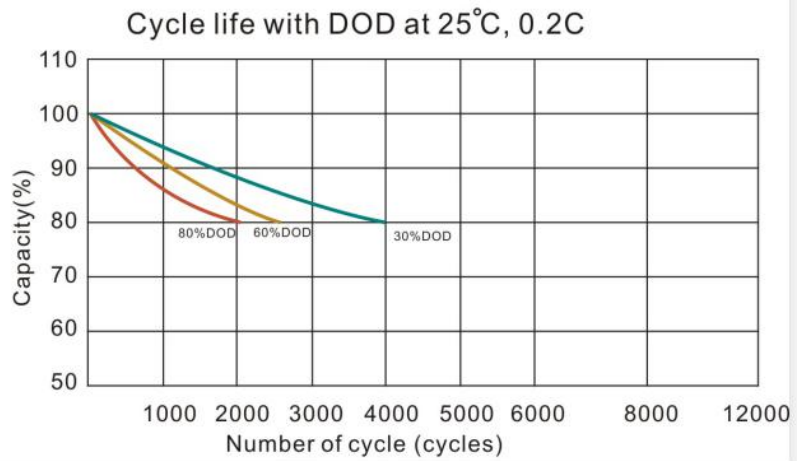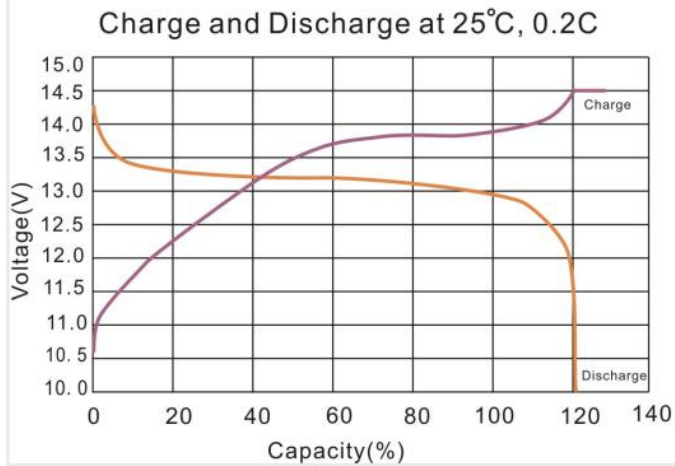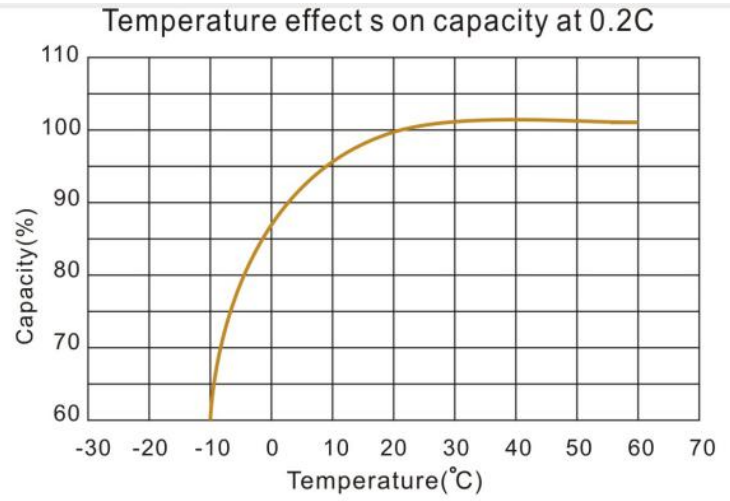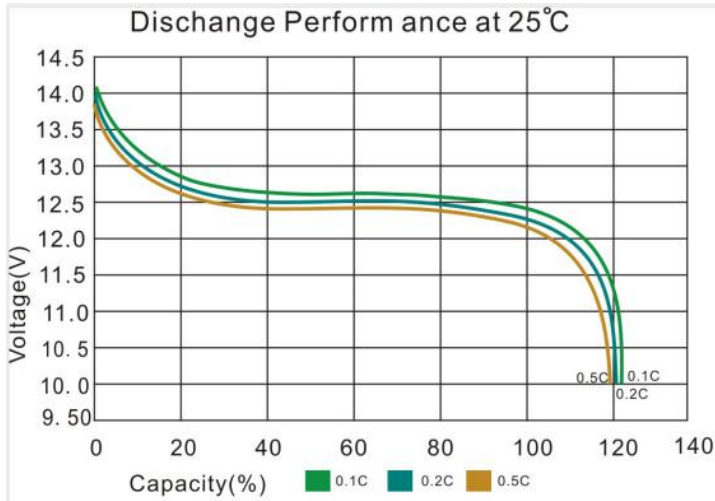

IMPORTANT NOTE: The specifications presented herein are subject to revision without notice.

KBLI121200 12.8V 120h



FEATURES & BENEFITS



High cycle life

>2000 cycles @80% DoD for effectively lower total cost of ownership.



Longer service life

Low maintenance batteries with stable chemistry. Easily monitor state of charge (SoC) of smart models.



Built in circuit protection

Battery Management Systems (BMS) are incorporated against abuse.



Better storage

Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



Quickly recharge

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



Extreme heat tolerance

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



Lightweight

Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.

APPLICATIONS

Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries. Suitable applications include:

- Caravan
- Marine
- Wheelchairs and scooters
- Solar / wind energy storage
- Back-up power for small UPS
- Golf trolleys & buggies
- Electric bikes
- Tools

CAUTIONS

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.

(Note) The Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data.

Contacto
energy@tempelgroup.com
www.tempelgroup.com

Tempel Group en el mundo

BARCELONA • MADRID • VALENCIA • BILBAO • SEVILLA • LISBOA • PORTO • BUENOS AIRES • LIMA
SANTIAGO DE CHILE • BOGOTÁ • SÃO PAULO • CIUDAD DE MÉXICO • CIUDAD DE PANAMÁ • MONTEVIDEO • QUITO



tempel
group