

# KB6225TR 6V 225Ah



Kaise motive power batteries are mainly used in electric bicycles, electric tricycles, low-speed electric cars, golf carts and sightseeing carts. The products are mainly supplied to the mainstream manufacturers in the industry.



## Performance Characteristics

Nominal Voltage	6V	
Dimensions	Length (mm / inch)	260 / 10.24
	Width (mm / inch)	180 / 7.09
	Height (mm / inch)	248 / 9.76
	Total Height (mm / inch)	279.5 / 11.0
Approx Weight	(Kg / lbs) 28.6 / 63.1	
Terminal	M8	
Container Material	PP	
Rated Capacity	225Ah / 11.3A	(20hr, 1.75V / cell, 25°C / 77°F)
	185Ah / 37.0A	(5hr, 1.75V / cell, 25°C / 77°F)
Reserve Capacity	25Amps	445min
	75Amps	115min

## Charge Method

### Initial Charge:


- ① 0.1C<sub>20</sub>(A) charging 15h
- ② 0.05C<sub>20</sub>(A) charging 10h

The temperature of the battery should be below 50°C during charging.


### Supplement Charge:

- a) Charging at a constant voltage of 7.35~7.5V/cell and a limited current 0.25C<sub>20</sub> (A) until the electrolyte density up to 1.280g/cm<sup>3</sup> (30°C) and the current not change for 3 hours.
- b) Charge with constant current 0.1C<sub>20</sub> (A) until the voltage between 7.8~8.4V/cell, and voltage maintains for 3 hours and not change.  
Two method optional.

## Cycle Life in Relation to Depth of Discharge

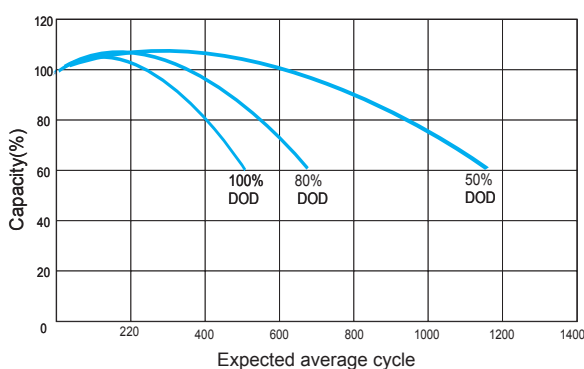

## Dimensions and Terminal (Unit: mm (inches))

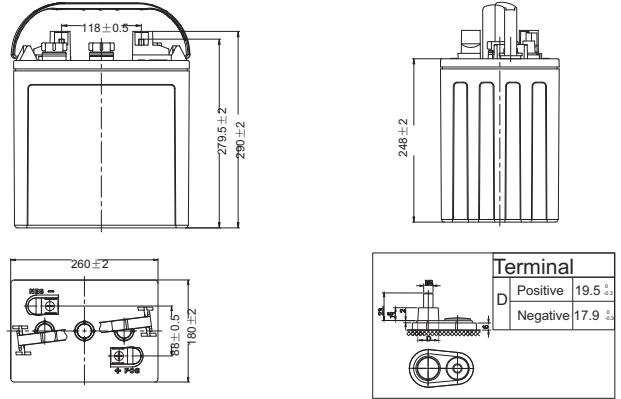

## Applications


- Electric bicycles
- Electric tricycles
- Electric cars
- Golf Carts
- Sightseeing Carts

## Certifications

ISO 9001 / ISO 14001



## Discharge Characteristics (25°C, 77°F)

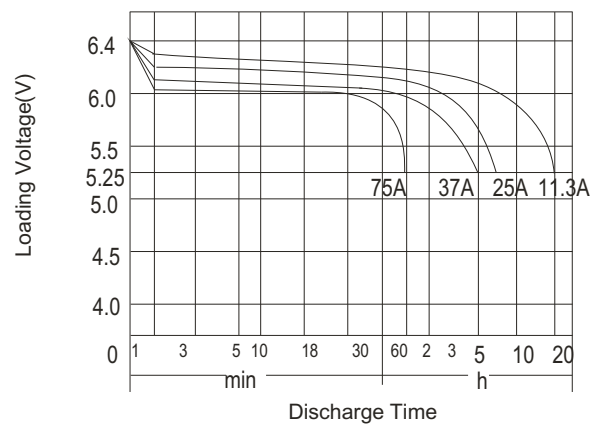

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.