KB6245TR 6V 245Ah

Kaise motive power batteries are mainly used in electric bicycles, electric tricycles, low-speed electric cars, golf carts and sightseeing carts. The products are mainly supplied to the mainstream manufacturers in the industry.

Performance Characteristics

Nominal Voltage	6V	
Dimensions	Length (mm / inch)	244 / 9.61
	Width (mm / inch)	191 / 7.52
	Height (mm / inch)	246.5 / 9.70
	Total Height (mm / inch)	268 / 10.6
Approx Weight	(Kg / lbs)	31 / 68.3
Terminal	1 (AP)	
Container Material	PP	
Rated Capacity	20hr	245Ah
	5hr	201Ah
Reserve Capacity	25Amps	500min
	75Amps	135min

Charge Method

Initial Charge:

①0.1C_{20}(A) charging 15h

②0 .05C_{20}(A) charging 10h

The temperature of the battery should be below 50℃ during charging.

Supplement Charge:

a) Charging at a constant voltage of 7.35~7.5V/cell and a limited current 0.25C_{20} (A) until the electrolyte density up to 1.280g/cm ^{3} (30℃) and the current not change for 3 hours.

b) Charge with constant current 0.1C_{20} (A) until the voltage between 7.8~8.4V/cell, and voltage maintains for 3 hours and not change.
Two method optional.

Charging Characteristics

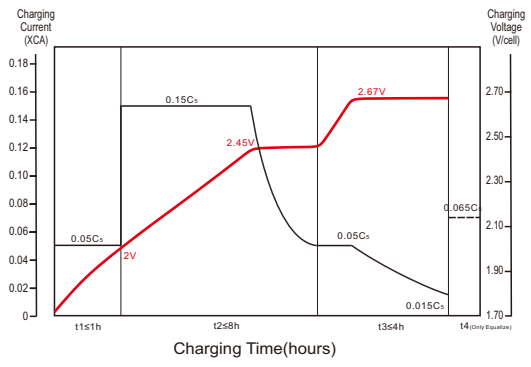

Dimensions and Terminal (Unit: mm (inches))

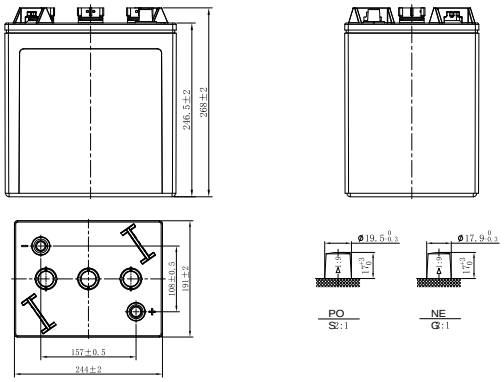

Applications

Electric bicycles
Electric tricycles
Electric cars
Golf Carts
Sightseeing Carts

Certifications

ISO 9001 / ISO 14001

Discharge Characteristics (25ºC, 77ºF)

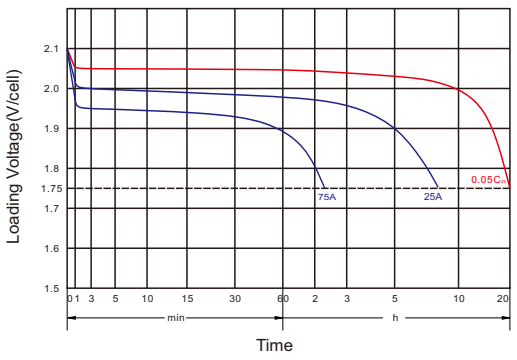

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the mimimum values.

2024/V/L