KBG121500 12V 150Ah (C_{20})

Gel battery shows some distinctive advantages over flooded battery or AGM battery, such as super thermal stability, high deep discharge capability, good recovery from deep discharge , even if the battery is left discharged for three days, it will recover to 100% of capacity. With the above-mentioned advantages, the gel battery has long service life, specially suitable for motive power applications, such as golf trailer, scrubber, folklift, etc.The deep discharge cycles increased 50% as compared with the AGM battery.

Performance Characteristics

Nominal Voltage	12V	
Design Life	12 years	
Dimensions	Length (mm / inch)	484 / 19.1
	Width (mm / inch)	170 / 6.69
	Height (mm / inch)	241 / 9.49
	Total Height (mm / inch)	241 / 9.49
Approx. Weight	(Kg / lbs)	42.5 / 93.7
Terminal	M8	
Container Material	ABS	
Rated Capacity	150.0Ah / 7.50A	(20hr, 1.75V / cell, 25ºC / 77ºF)
	128.5Ah / 25.7A	(5hr, 1.70V / cell, 25ºC / 77ºF)
	92.6Ah / 92.6A	(1hr, 1.70V / cell, 25ºC / 77ºF)
Max. Discharge Current	1800A (5s)	
Internal Resistance	Approx 3.5mΩ	
Operating Temp. Range	Discharge : -20 ~ 50ºC (-4 ~ 122ºF)	
	Charge : -20 ~ 50ºC (-4 ~ 122ºF)	
	Storage : -20 ~ 50ºC (-4 ~ 122ºF)	
Cycle Use	Maximum charging current 37.5A	
	Voltage: 14.4V ~ 15.0V at 25ºC (77ºF)	
	Temp. Coefficient: -30mV/ºC	
Standby Use	Maximum charging current 37.5A	
	Voltage: 13.5V ~ 13.8V at 25º C (77º F)	
	Temp. Coefficient: -18mV/ºC	
Capacity affected by Temperature	40ºC (104ºF)	103%
	25ºC (77ºF)	100%
	0ºC (32ºF)	86%
Self Discharge	Fully charged Kaise Gel Series batteries may be stored for up to 6 months at 25ºC (77ºF) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

Discharge Constant Current (Amperes) at 77ºF (25ºC)

Volts/cell	15min	30min	1h	2h	3h	5h	10h	20h
1.80V	226	147	88.9	51.4	37.4	24.7	13.9	7.46
1.75V	242	154	91.3	52.3	37.7	25.4	14.1	7.50
1.70V	250	155	92.6	53.1	38.1	25.7	14.2	7.53
1.65V	256	158	93.3	53.6	38.7	26.0	14.4	7.57
1.60V	264	161	93.9	53.8	39.1	26.2	14.5	7.61

Dimensions and Terminal (Unit: mm (inches))

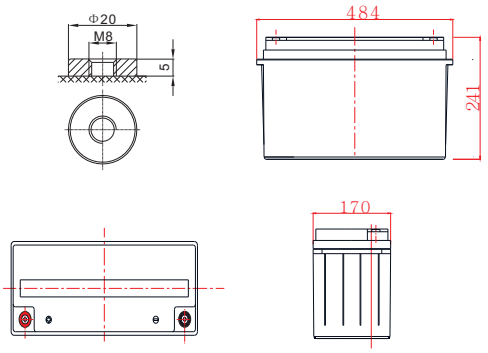

Applications

Wind and solar energy systems
Cable TV systems
Telecommunications
Electric wheel chairs
Military equipment
Emergency lighting
Power plants
Medical equipment
Golf carts

Certifications

ISO 9001 / ISO 14001

Discharge End Voltage vs. Discharge Current

Final discharge voltage V/CELL	1,8	1,75	1,7	1,6
Discharge current (A)	I ≤ 0,1CA	0.25CA ≥ I > 0.1CA	0.55CA ≥ I > 0.25CA	I > 0.55CA

Discharge Constant Power (Watts per cell) at 77ºF (25ºC)

Volts/cell	15min	30min	1h	2h	3h	5h
1.80V	424	280	172	100	72.3	48.2
1.75V	448	286	173	101	72.5	48.8
1.70V	451	288	175	101	73.0	49.0
1.65V	457	288	176	102	73.4	49.5
1.60V	465	290	177	102	74.3	49.7

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the mimimum values.

KBG121500 12V 150Ah (C_{20})

Charging Characteristics (cycle use)

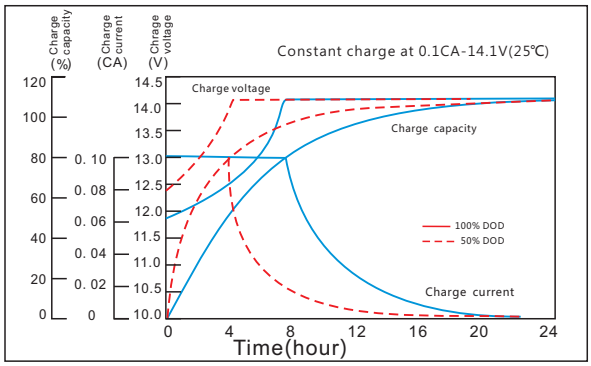

Discharge Characteristics

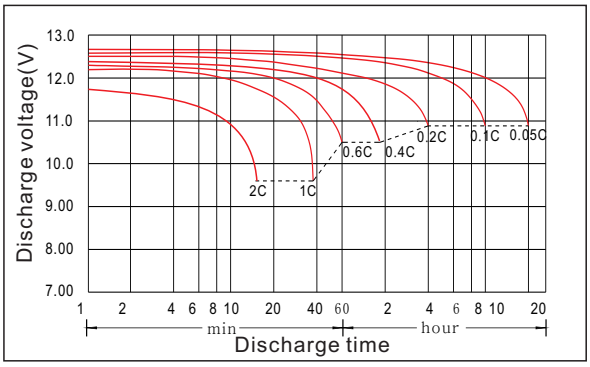

Temperature Effects in Relation to Battery Capacity

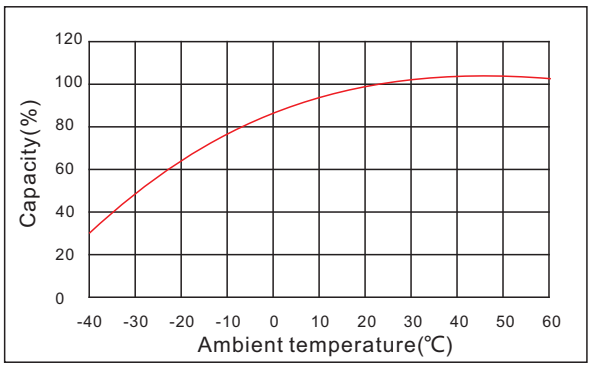

Cycle Life in Relation to Depth of Discharge

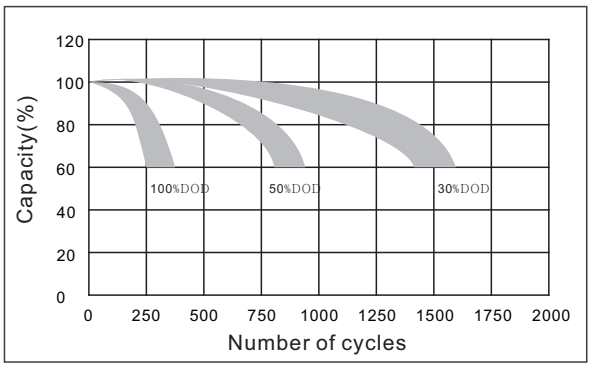

Curves of Self-Discharge

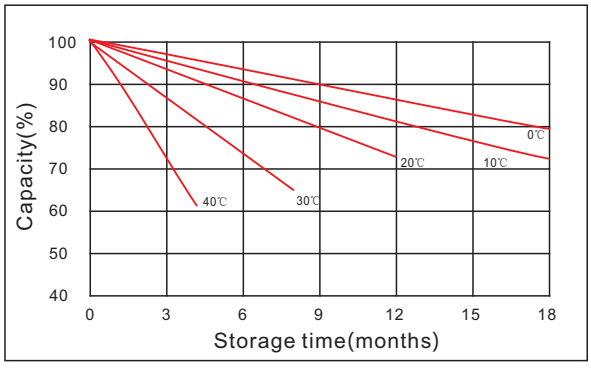

Curves of Open Circuit Voltage vs. Capacity

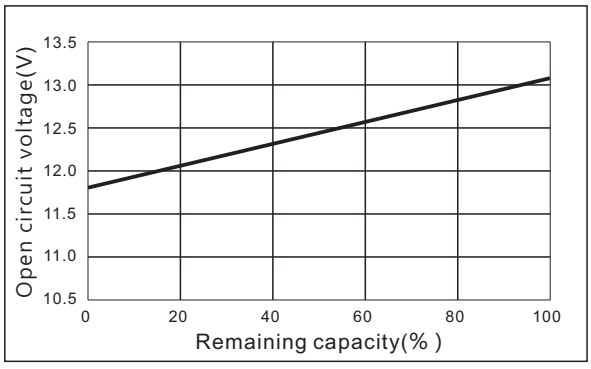

IMPORTANT NOTE: The specifications presented herein are subject to revision without notice.

2025/V/K